SILVERLINE

by GIULIANO AUTOMOTIVE EQUIPMENT

www.giuliano-automotive.com

The best choice for the average tyre shop with budget goal.

SL21 PRO

Mid Volume · 110V-1PH

SWING ARM TYRE CHANGER WITH DUAL ASSIST ARM FOR CAR WHEELS 10” - 26”

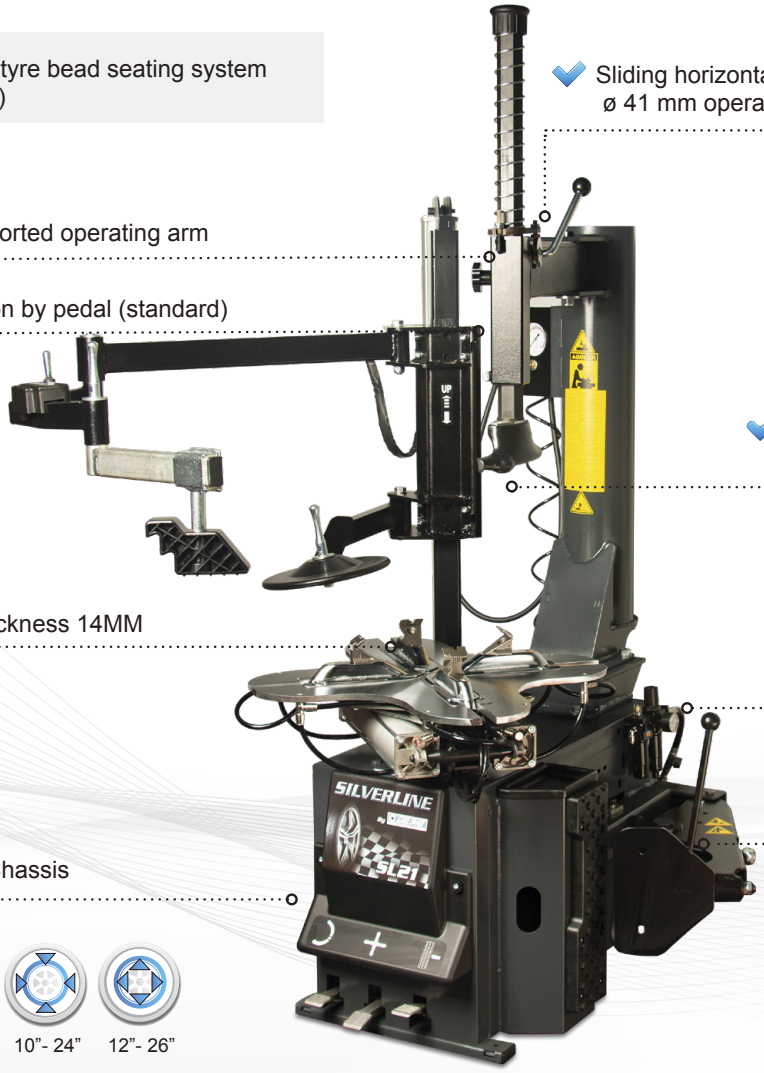

- Tubeless tyre bead seating system (standard)
- Sliding horizontal arm with ø 41 mm operating arm
- **PA ECO** additional arm to ease mounting operations of low profiled and UHP tyres
- Spring supported operating arm
- Tyre inflation by pedal (standard)
- Fitting plastic head designed for both standardand low proffiled tyre applications
- Tabletop thickness 14MM
- Bead breaker double effect Cylinder ø 200 mm., made in aluminum
- Reinforced Chassis

STANDARD FEATURES

Rim clamping from outside	10” - 24”
Rim clamping from inside	12” - 26”
Max. tyre diameter	43”
Max. tyre width	15”
Bead breaker cylinder force at 10 Bar	30800 N
Operating pressure	10 bar (145 Psi)
Power supply	110V-1ph
Motor power	0,90 KW (230V-1Ph)
Rotation speed	7 rpm
Pre-set tyre inflating pressure	3,5 bar (50 Psi)
Net weight	300 kg
Max. overall dimensions	1420x1740x2010 mm

** By adjustable jaws*

STANDARD ACCESSORIES

- Bead lifting lever
- Lubricator + Pressure regulator

GROUP GIULIANO

Giuliano Industrial S.p.A: Via Guerrieri, 6 - 42015 CORREGGIO (RE) ITALY
Tel. +39 0522 731111 - Telefax +39 0522 633109 - E-mail: info@giuliano-automotive.com -
Internet: www.giuliano-automotive.com